Product information

- Indoor use only
- Dimmable When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

- 1. Check your power supply is switched on
- 2. Turn off the light and check that the bulb is inserted correctly
- 3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 3 x 6W Recommended bulb:

6W LED E14 Candle bulb for maximum brightness.

Lower wattages are also suitable. Rated input: 220 –240V, 50Hz

Bulbs not included IP rating: 20 Weight: 1.1kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc SW1V 2QQ johnlewis.com




01/04/2025

Made in ChinaPlease retain these instructions for future reference.



RATTAN SCALLOP SEMI FLUSH USER GUIDE

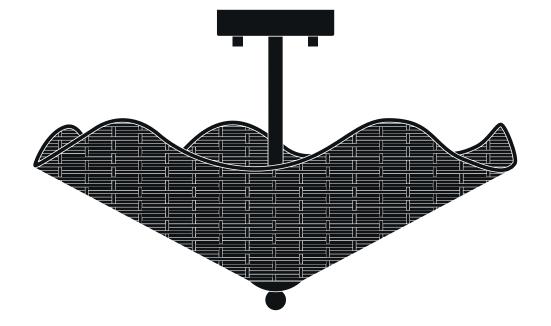



Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class 1 product and must be earthed.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated. Dispose of used bulbs carefully.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

The shade is made from natural rattan and some variances in colour and texture may occur. This is the unique characteristic of the product.

For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning or removing the shade.

Parts list

Description	Image	Quantity
Light fitting + x 1 metal pan & x 1 metal topper (fitted to stem)		x1
Shade		x1
Metal washers		x 2
Wall plugs		x 2
Screws	(famanana)	x 2

Product assembly


Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Remove the fixing bracket (A) from the product by unscrewing the two finials (B) and retain for reuse. Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (C) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes.

Fix the bracket to the ceiling using supplied metal washers and screws (D).




Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block (E) inside the product in the following way. Check that: You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.



Step 4

Re attach the product to the fixing bracket using the two finials removed in step 2 and tighten to secure. Take care not to trap any wiring.

Step 5

Fit the recommended bulbs (F) as per the details overleaf.

Step 6

Attaching the shade (G) maybe easier with the help of an assistant. First remove the metal topper (I), and metal pan (H) from the stem. Fit the shade and refit the metal pan and topper to secure in place. Tighten with light pressure.

Your light is now ready for use.

Please note

When changing the bulb, make sure to hold the shade before removing the metal topper and pan.

