

Product information

- Indoor use only
- Dimmable - When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish
- Glass parts - Just use a damp cloth. Do not use abrasive materials as these will damage the finish. Take care when handling glass parts to avoid damage or injury

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 5 x 6W
Recommended bulb:
6W LED E14 Golf bulb for maximum brightness.
Lower wattages are also suitable.
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 20
Weight: 13.0kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China




21/04/2026

Please retain these instructions for future reference.

JOHN
LEWIS
& PARTNERS

VETRO 5 LIGHT PENDANT USER GUIDE

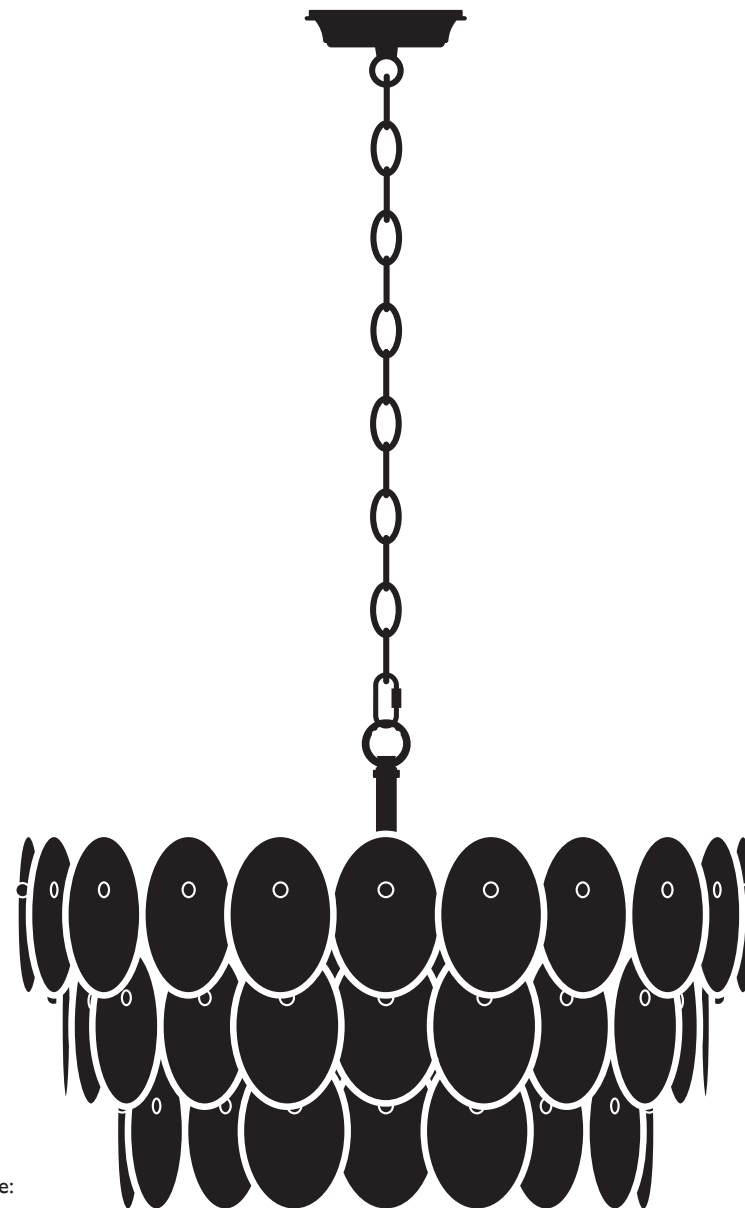

Product Code:
70169602

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class 1 product and must be earthed.
It is recommended that this fitting is installed by a qualified electrician.
Install in accordance with the IEE Wiring regulations and the Building Regulations.
To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.
If you are in any doubt, please consult a qualified electrician.
This light fitting should be connected to a 5 Amp fused circuit.
If replacing an existing fitting, make a note of the connections.
Always use the correct type and wattage bulb. Never exceed the wattage stated.
Dispose of used bulbs carefully.
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
This product contains glass so care must be taken when fitting or handling to prevent personal injury or damage to the product.
Please note: The glass panels are hand made and some variation in shape and thickness can occur. This is not a fault but a unique characteristic of this product.
For your safety, always switch off the supply and allow the fitting to cool down before changing the lightbulbs, cleaning or adjusting.

Parts list

Description	Image	Quantity
Light fitting		x 1
Glass panels Spare panels		x 60 x 1
Finials Spare finials		x 60 x 2
Metal washers		x 4
Wall plugs		x 4
Screws		x 4


Product assembly

Step 1
Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires. **Please note:** This product is very delicate and will be easier to assemble with the help of an assistant.

Step 2
Remove the fixing bracket (A) from the product by unscrewing the two finials (B) and retain for reuse. Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (C) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes. Fix the bracket to the ceiling using supplied metal washers (D) and screws (E). **Please note: This is a heavy product and appropriate ceiling fittings MUST be used to support the weight.**

Step 3
The hanging height of this product can be adjusted. Unscrew the carabiner (F) on the bottom chain link and refit to achieve the desired drop. Re-tighten to secure and then remove excess chain links with 2 pairs of pliers. Pull the cable through the cord grip (G) until the desired height is achieved. Always ensure the weight of the product is supported by the chain and not the cable.
Please note: Do not loosen the cable clamp screw inside the ceiling cup as this is securing the cable into the terminal block.

Step 4
Having identified the household wiring from your existing light fitting, connect to the connection block (H) inside the product in the following way. **Check that:** You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block.

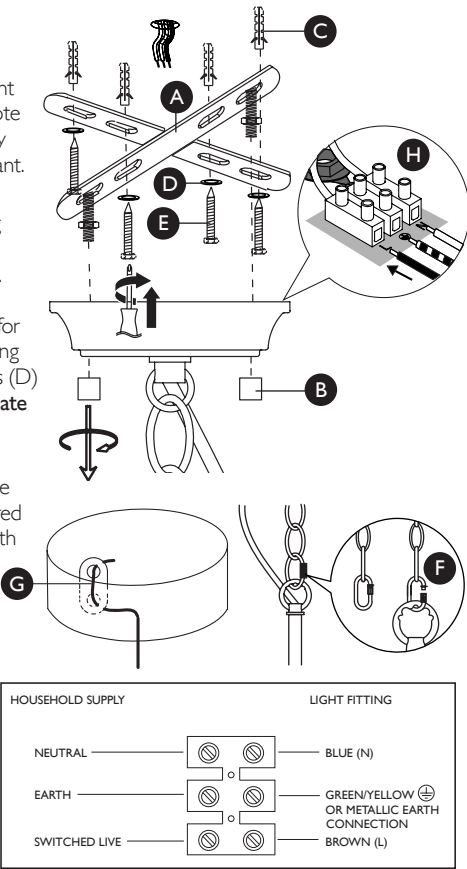

Step 5
Reattach the product to the fixing bracket using the two finials removed in step 2 and tighten to secure. Take care not to trap any wiring.

Step 6
Fit the recommended bulbs (I) as per the details overleaf.

Step 7
To attach the glass panels (J), first remove the small finials (K) from the light fitting and set aside. Fit the glass panels to the bottom frame and secure in place by refitting finials. Make sure to arrange each panel as shown (see fig. 1).
Please note: it will be easier to attach all the back panels first to the frame before attaching the front panels. Fit the remaining glass panels to the middle and then top frame in the same way. Tighten the screws carefully to secure - take care not to overtighten. Be careful not to allow the glass panels to collide as damage could occur.
Your light is now ready for use.

Note: Glass panels vary in weight. To ensure the product hangs level, adjust the carabiner position on the hanging loop (see fig. 2). If still not level, consider exchanging the position of glass panels on the product to improve the balance.

