

**Care and cleaning**

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

**Recommended bulb**

5 x 40W

SES Candle

or

5 x 3W

SES LED Energy Efficient Candle Clear

or

5 x 28W

SES Eco Halogen Candle

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Use a soft cloth to handle halogen bulbs, avoid directly touching the bulbs as this will shorten their life. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

**Specification**


Maximum wattage: 40W

Voltage: 240V, 50Hz

IP Rating: 20

Weight: 1.25kg




This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Partnership  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)

Made in China

08/12/2020

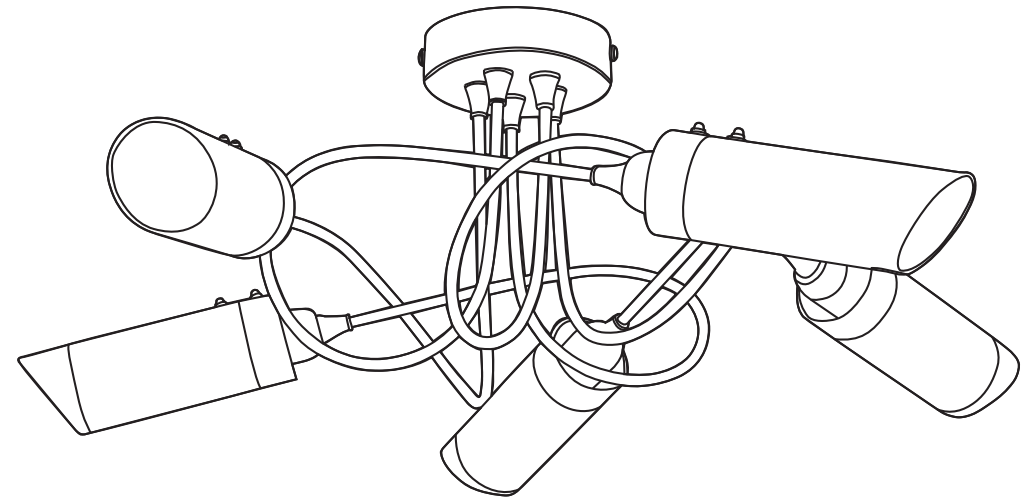

Thank you for purchasing this Limbo light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please keep these instructions for future reference.

### Warnings!

**This is a Class I product and must be earthed.**

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb or adjusting the heads, always switch off at the mains and allow to cool down. Dispose of used bulbs carefully.

This product is suitable for indoor use only.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).





### Fixing Instructions

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

The installation of this fitting will be much easier with the help of an assistant.

### Parts List

Light fitting		1	Glass Shades		5
Screws		2	Wall plugs		2

### Installation Instructions


Refer to assembly diagrams. Carefully unpack the carton, making sure all the parts are present before assembly.

#### Step 1

Existing ceiling roses must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, **carefully note the position of each set of wires.** Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. **The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.**


#### Step 2

Remove the fixing bracket (A) from the ceiling cover by removing side screws (B) and attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

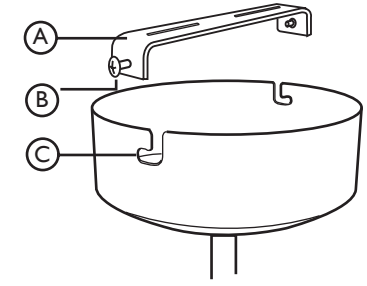

#### Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

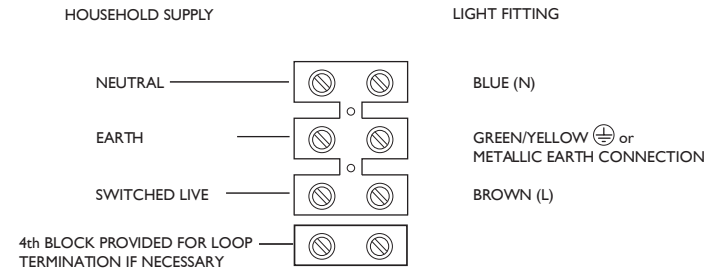

#### Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

#### Step 4

When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

#### Step 5

This product has "L" shaped fixing slots to allow easy fixing to the ceiling strap. Locate the "L" slots (C) around the small screws (B) on the ceiling strap (A) (see diagram in step 2). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.


#### Step 6

Fit the recommended bulb as per the details on the back.

#### Attaching the shades

To attach the glass shades, remove cap nuts and washers. Ensure one washer is either side of the glass. Place the glass over the retaining threads and refit the cap nuts.

**Do not overtighten.**

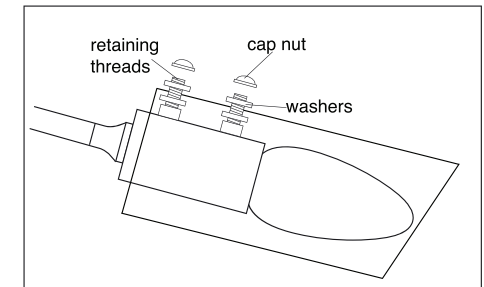

#### Step 7

Replace fuse or circuit breaker and switch on. Your light is now ready for use.