

Product information


- Indoor use only
- Non dimmable
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting


If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 11.3W
Rated input: 220 –240V, 50Hz
IP rating: 20
Weight: 0.34kg
Lumen output: 983
Colour temperature: Warm white (3000K)
This product contains a light source of energy efficiency class F
For further information please visit: www.lighting-info.co.uk/75496



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China




Please retain these instructions for future reference.

27/05/2026

JOHN LEWIS

MILES LED FLUSH CEILING LIGHT USER GUIDE

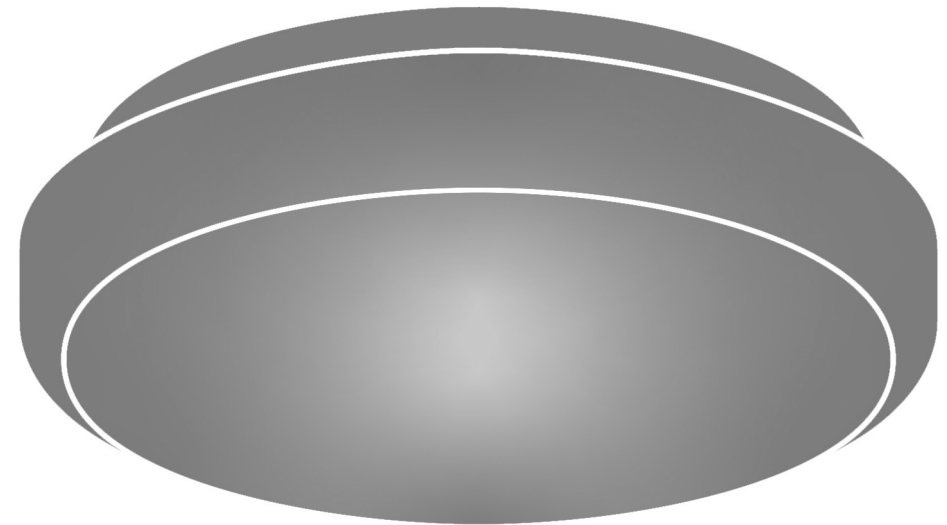


Product Code:
10510116

Thank you for purchasing this Miles flush light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!



This is a Class I product and must be earthed.
Please read these instructions carefully before commencing any work.
It is recommended that this fitting is installed by a qualified electrician.
Install in accordance with the IEE Wiring regulations and the Building Regulations.
To prevent electric shock switch off at mains supply before installing or maintaining this fitting.
Ensure other persons cannot restore the electrical supply without your knowledge.
If you are in any doubt, please consult a qualified electrician.
This light fitting should be connected to a 5 Amp fused circuit.
If replacing an existing fitting, make a note of the connections.
This product is not suitable for connection to dimmer switches.
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
Ensure the correct fixings are used for the installation surface.
For your safety, always switch off the supply before cleaning or removing the shade.
Caution: The shade thickness has been optimised to provide maximum light output.
Do not apply excessive force when removing the shade to avoid damaging it.

Parts list

Parts list	Image	Qty
Light fitting		1
Screws		3
Wall plugs		3
Shade		1


Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly. The installation of the product will be easier with the help of an assistant.
Carefully remove the shade (A) by grasping the sides and turning anti- clockwise to disengage from the metal back plate.

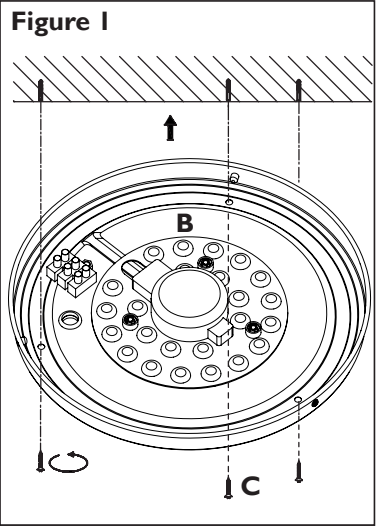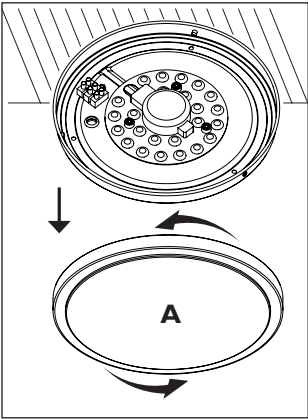

Step 2

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.

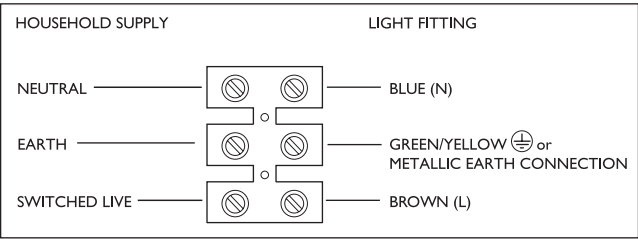

Check that

You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.

Step 3

Fit the shade (A) by placing over the fitting and twisting clockwise until it locks in place.

Step 4

Replace fuse or circuit breaker and switch on.
Your light is now ready for use.

