

## Product information


- Indoor use only
- Non-dimmable
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

## Aftercare and Troubleshooting


If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

## Specification

Max power: 28.1W  
Rated input: 220 –240V, 50Hz  
IP rating: 20  
Weight: 0.98kg  
Lumen output: 70132109: 1795 70132113: 1300  
Colour temperature: Warm white (3000K)  
This product contains a light source of energy efficiency class F  
For further information please visit: 79553



Replaceable light source by a professional




Replaceable control gear by a professional

## 5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

## Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

John Lewis Plc  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)

Made in China




13/04/2023

Please retain these instructions for future reference.



# OVALS SEMI FLUSH LIGHT USER GUIDE

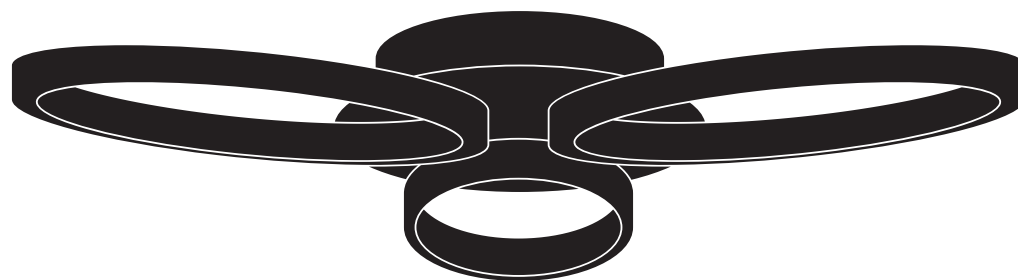

Product Code:  
70132109  
70132113




**Getting started**

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

**Warnings**

This is a Class II product and must NOT be earthed.  
It is recommended that this fitting is installed by a qualified electrician.  
Install in accordance with the IEE Wiring regulations and the Building Regulations.  
To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.  
If you are in any doubt, please consult a qualified electrician.  
This light fitting should be connected to a 5 amp fused circuit.  
If replacing an existing fitting, make a note of the connections.  
This product is suitable for indoor use only.  
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).  
When moving or cleaning, always switch off at the mains and allow the module to cool before handling.


**Parts list**

Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 2
Screws		x 2


**Product assembly**

**Step 1**  
Refer to assembly diagrams right. Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

**Step 2**  
Remove the fixing bracket (A) from the ceiling cover by removing side screws (B) and attach to the ceiling using the screws provided (C). Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

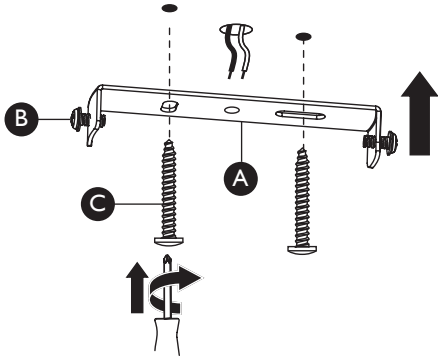

**Step 3**  
Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.  
Check that:  
You have correctly identified the house wires.  
The connections are tight.  
No loose strands have been left out of the connection block.  
The lid is closed securely over the terminal block

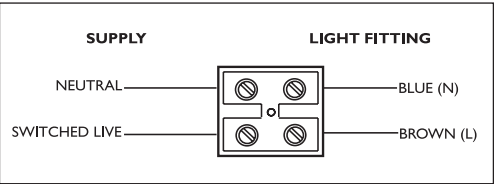

**Step 4**  
Locate the “L” slots (D) around the small screws (B) on the fixing bracket (A). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

**Step 5**  
Replace fuse or circuit breaker and switch on. Your light is now ready for use.

